




# Les Paul Wireless Guitar Battery Pack Replacement

This guide will show how to replace the guitar's battery pack.

Written By: Chris

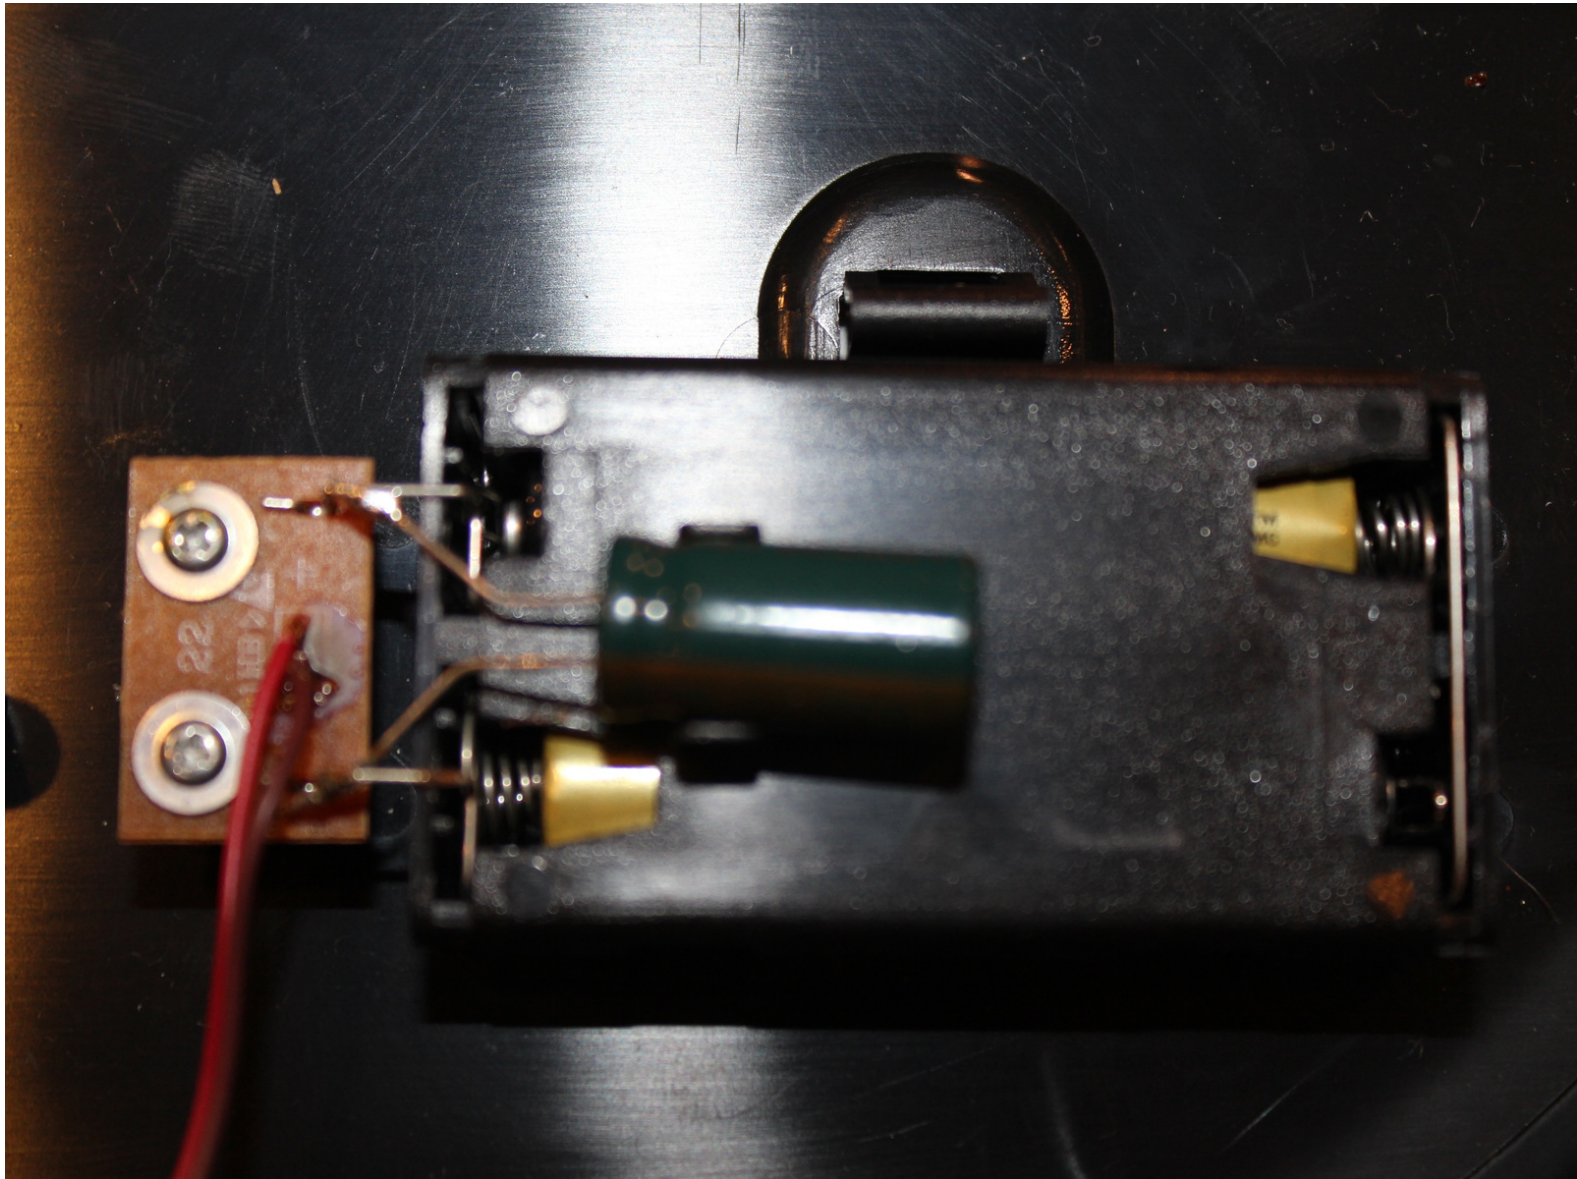

## INTRODUCTION

This guide will show how to replace the guitar's battery pack. The battery pack supplies power to the controller and houses the two AA batteries required for the controller.

## Step 1 — Les Paul Wireless Guitar Body Teardown



⚠ Remove batteries


## Step 2



- Remove void warranty sticker
- The sticker is covering a torx screw




## Step 3

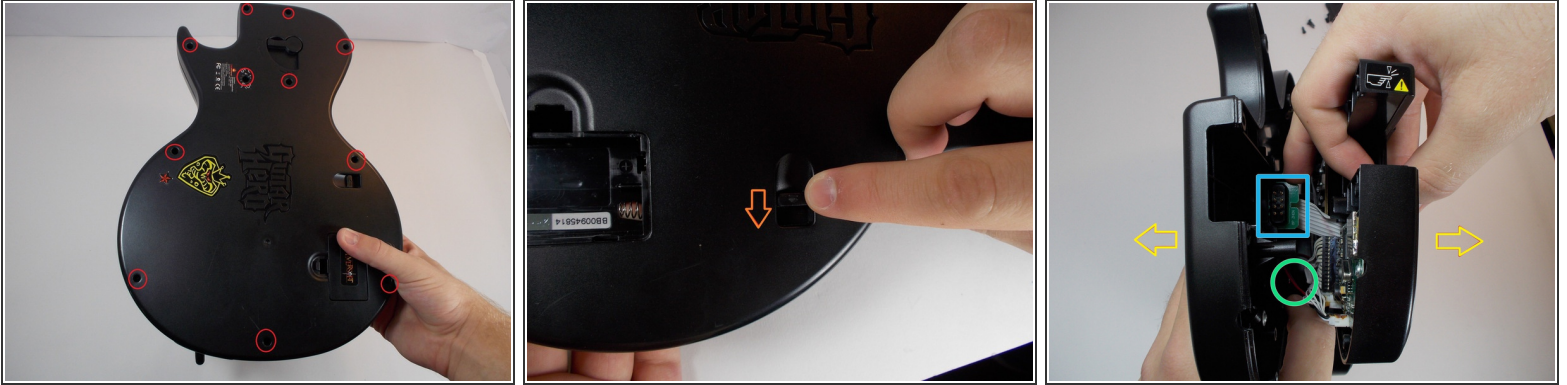


- Unscrew the 11 screws securing the back of the body using a T10 Torx screwdriver. Each screw is 1 cm long.
- Push level, this will detach the back of the guitar from the front.
- Carefully remove the back of the body
  - The battery pack cord is attached to both sides of the guitar, be careful not to tear it apart.
  - The neck connector may be stuck to the back so be sure to detach it before fully pulling

## Step 4 — Battery Pack

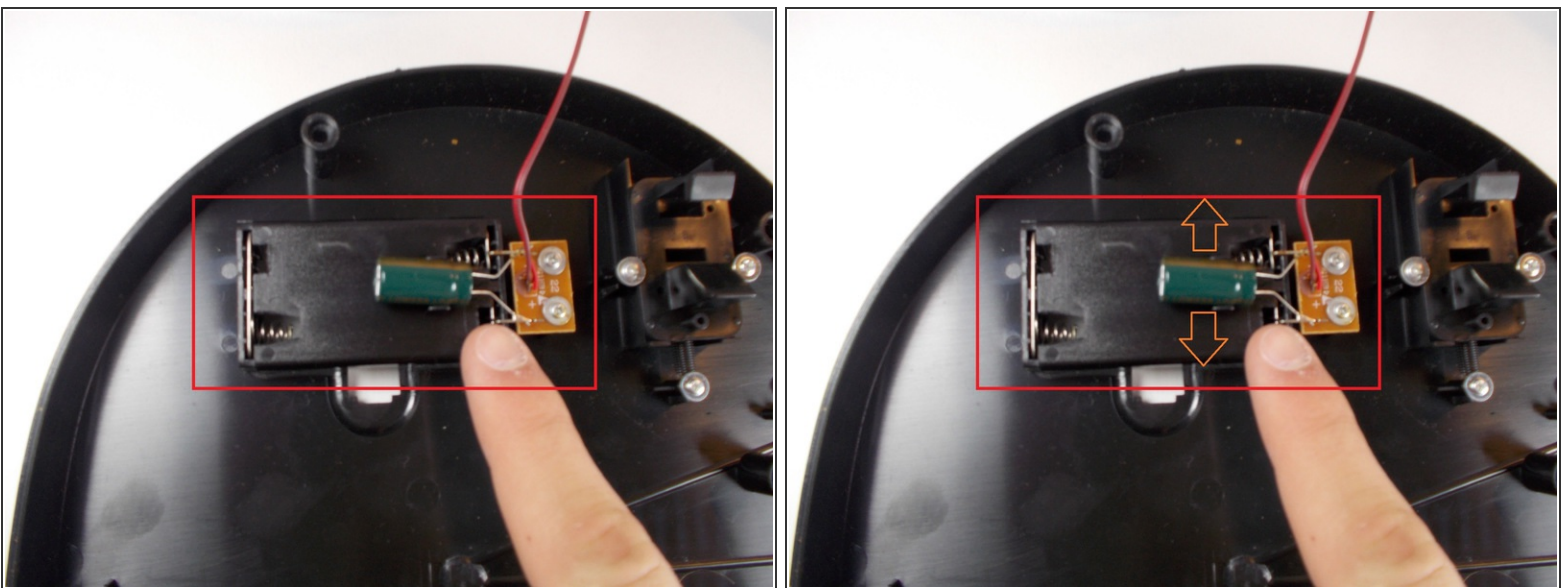

- Gently move the capacitor around until it breaks off

## Step 5

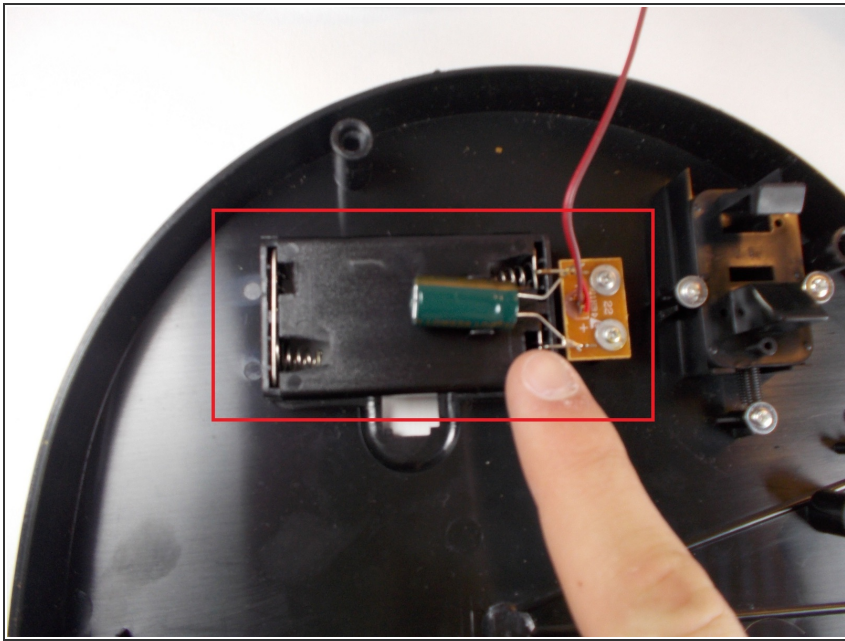

- Solder on the new capacitor.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-24 02:08:47 PM.